



1803 TELEPHONE ENTRY SYSTEM

BEST SUITED FOR APPLICATIONS THAT DO NOT REQUIRE A DIRECTORY, OR WHERE A SEPARATE DIRECTORY ALREADY EXISTS



flush mount

surface mount

- Provides visitor access control into apartment buildings, gated communities, condominiums, office buildings, factories and industrial sites
- Visitors use the phone system to communicate with a resident who can grant or deny access via their own touch-tone telephone
- Provides service for up to 1000 residents
- Programmable directory codes can be set from 1 to 4 digits
- 2 year limited factory warranty



modular design
makes installation and service easy



dtmf tone output
useable with PBX, KSU and telephone systems with auto-attendants




two mount styles
surface and flush are available



built-in display
indicates door/gate has been opened

1803 TELEPHONE ENTRY SYSTEM

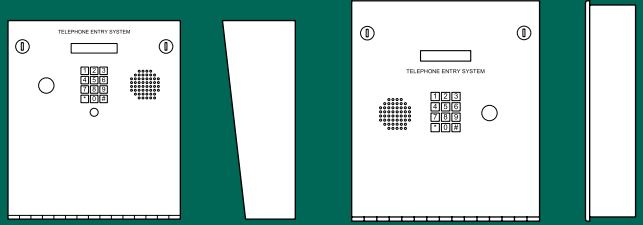

1803 Surface

11.25" W x 13" H x 4.5" D
(285mm W x 330mm H x 114.3mm D)

1803 Flush

12" W x 13.25" H x 3.25" D
(305mm W x 336.5mm H x 82.5mm D)

1803	PHONE # MEMORY	ENTRY CODES	DEVICE CODES	RELAYS	DIRECTORY	ELEVATOR CONTROL	PROGRAMMING OPTIONS	OPTIONS	TRANSACTION BUFFER
Surface Mount	1000	1000 (4-digit) 6 (5-digit)	-	2	No	No	System Keypad or Touch-Tone Telephone	Handset Kit	No
Flush Mount	1000	1000 (4-digit) 6 (5-digit)	-	2	No	No	System Keypad or Touch-Tone Telephone	Gold Plated Faceplate	No

Technical Features

Mechanical

- Stainless steel faceplate
- Galvanized steel sub-plate
- Metal keypad
- Offset speaker holes for protection
- Hands free voice operation (Optional handset available on surface mount only)
- Surface or Flush mounting styles
- Flush mount requires flush mounting kit
- Enclosures are rated NEMA 4x
- Built-in postal lock provision

Electrical

- 16 VAC (power transformer included)
- Full Duplex voice communication
- Stores up to 1000 phone numbers, 15 area codes
- Two relays allow for control of both a vehicular gate and a pedestrian gate
- Programmable directory codes (1 to 4 digits)
- 10 & 11 digit dialing capability
- DTMF tone output allows for use with PBX and auto-attendant type phone systems
- Four-digit entry codes = 1000
- Five-digit entry codes = 6
- Built-in clock / calendar
- Time clock has its own backup power source
- Hold open time zones (4)
- Entry code time zones
- Flash entry codes
- Two special inputs can be programmed for relay activation or dial-out function
- Time zone restrictions on selected entry codes
- LCD display for programming assistance and shows 'open' when access is granted

Miscellaneous

- Environmental: 10°F to 145°F (-12°C to 62°C)
- ADA Compliant handset kit (P/N 1807-012) available on surface mount only
- Camera Ready: Optional B&W or Color CCTV camera*
*may require additional CCTV equipment
- Shipping weight approximately 15-20 Lbs (6.8-9 kg)



FCC (US) DUF6VT-12874-0T-0
DOC (CAN) 1736 4507 A



Access Control Solutions since 1948

Distributed by:

MEMBER:



DOOR KING, INC.

120 Glasgow Avenue, Inglewood, California 90301 U.S.A.
Tel: 310-645-0023 FAX: 310-641-1586 www.doorking.com

© 2012 All Rights Reserved. Product specifications may change without notice.
Rev. 9/12