



# 1833 PC PROGRAMMABLE TELEPHONE ENTRY SYSTEM



**BEST SUITED FOR APPLICATIONS THAT DO NOT REQUIRE A DIRECTORY, OR WHERE A SEPARATE DIRECTORY ALREADY EXIST**



flush mount

surface mount

- Provides both resident and visitor access control into and within apartment buildings, gated communities, condominiums, office buildings, factories and industrial sites
- Visitors use the phone system to communicate with a resident who can grant or deny access via their own touch-tone telephone
- Resident access control is provided by means of cards, digital PIN codes, or wireless transmitters
- PC programmable. Programming and Transaction Analysis software included
- Voice and data (programming) connection over either Cellular, VoIP, Wireless, or copper POTS lines
- 2 year limited factory warranty



**wireless expansion**  
up to 24 entry points



**modular**  
easy installation and service




**pc programmable**  
easy to use software included



**voice and remote programming**  
use almost any phone service and retrofit to older DKS units

# 1833 PC PROGRAMMABLE TELEPHONE ENTRY SYSTEM

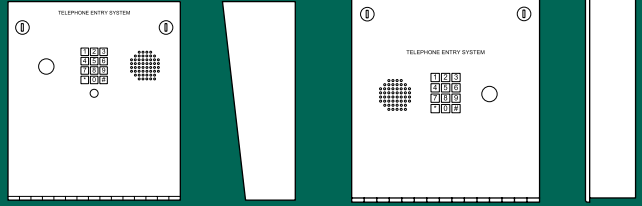

**1833 Surface**  
11.25" W x 13" H x 4.5" D  
(285mm W x 330mm H x 114.3mm D)

**1833 Flush**  
12" W x 13.25" H x 3.25" D  
(305mm W x 336.5mm H x 82.5mm D)

1833	PHONE # MEMORY	ENTRY CODES	DEVICE CODES	DOOR CONTROL	DIRECTORY	ELEVATOR CONTROL	PROGRAMMING	OPTIONS	TRANSACTION BUFFER
<b>Surface Mount</b>	3000	1000 (4-digit)	8000	3 Doors *	No	Yes	PC with ** Remote Account Manager Software		8000 Events
<b>Flush Mount</b>	3000	1000 (4-digit)	8000	3 Doors *	No	Yes	PC with ** Remote Account Manager Software	Gold Plated Faceplate	8000 Events

\* Expands to 24 with Tracker Expansion Boards (wired or wireless)

\*\* Software is included with the DKS system

## Technical Features

### Mechanical

- Stainless steel faceplate
- Galvanized steel sub-plate
- Metal keypad
- Offset speaker holes for protection
- Hands free voice operation (Optional handset available on surface or flush mount only)
- Surface or Flush mounting styles
- Flush mount requires flush mounting kit
- Enclosures are rated NEMA 4x

### Connection Methods

- Cellular (powered by AT&T 4G LTE)
- VoIP (select your own VoIP provider)
- Wireless (Short distances - up to 1000 ft. max)
- POTS (Plain Old Telephone Service)

Some of the connection methods noted may incur additional cost for required hardware and/or service subscriptions.

### Specifications

- 16 VAC (2 power transformer included)
- Full Duplex voice communication
- Stores up to 3000 phone numbers, 255 area codes
- Max 8000 Weigand device (card codes), 10 facility codes
- Transaction buffer stores last 8000 events
- Control 2 entry points, expandable to 16 with tracker expansion boards
- Programmable directory codes (1 to 4 digits)
- 10 & 11 digit dialing capability
- 31 security (permission) levels, 29 programmable with 4 time zones each
- 32 holiday schedules
- Four-digit entry codes
- Built-in clock / calendar
- Hold open time zones (8)
- True Anti-Pass Back
- Elevator control option
- Live Transactions feature (requires TCP/IP internet connection or RS-232 connection)

### Miscellaneous

- Environmental: 10°F to 145°F (-12°C to 62°C)
- ADA Compliant handset kit (P/N 1807-012) available on surface or flush mount only
- Camera Ready: Optional B&W or Color CCTV camera\* \*may require additional CCTV equipment
- Shipping weight approximately 15-20 Lbs (6.8-9 kg)



FCC (US) DUF6VT-12874-OT-T  
DOC (CAN) 1736 4528 A

AT&T, the AT&T logo and all other AT&T marks contained herein are trademarks of AT&T Intellectual Property and/or AT&T affiliated companies



Access Control Solutions since 1948

Distributed by:

### MEMBER:



### DOORING, INC.

120 Glasgow Avenue, Inglewood, California 90301 U.S.A.  
Tel: 310-645-0023 FAX: 310-641-1586 www.dooring.com  
© 2015 All Rights Reserved. Product specifications may change without notice.  
Rev. 5/15